Cetetherm

PRE-SELECTION
CETETHERM TAP WATER SYSTEMS

1. TYPE OF TAP WATER SYSTEM

Competitive solution		Compact solution	Condensing & heat pump solution	Secured solution
UP TO **1000 KW**	UP TO **410 KW**	UP TO **350 KW**	UP TO **1200 KW**	UP TO **765 KW**
AquaFirst	**AquaGenius**	**AquaCompact**	**AquaEfficiency**	**AquaProtect**
☐ Plates & gaskets WRAS APPROVED PRODUCT	☐ Copper brazed ☐ 100% stainless steel fusion-bonded	See specific Pre-selection file for AquaCompact units	☐ Plates & gaskets ☐ Copper brazed ☐ 100% stainless steel fusion-bonded	☐ Plates & gaskets (anti-legionella system)

2. FLOWCHART

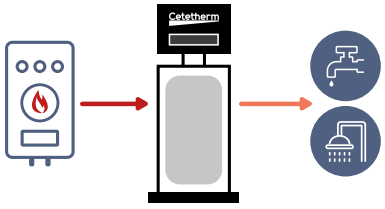

☐ **Instantaneous with boiler**

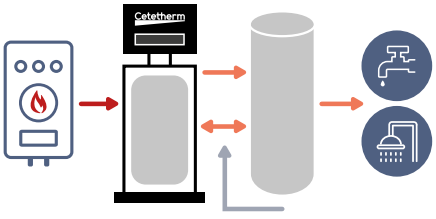

☐ **Semi-instantaneous with boiler**
(allows to decrease the capacity of the boiler)

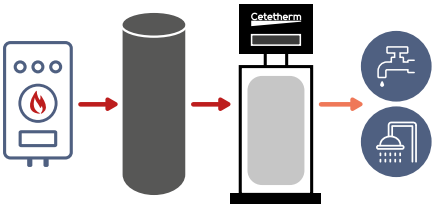

☐ **Instantaneous with a Primary storage tank and boiler (Combitherm)**
(allows to decrease the capacity of the boiler)

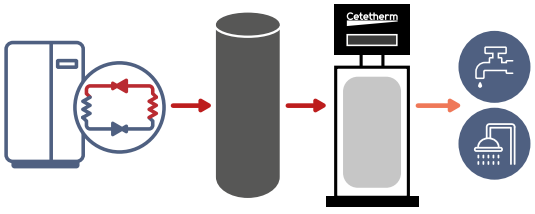

☐ **Instantaneous with a Primary storage tank and heat pump**
(energy efficient with a high COP)

Cetetherm

3. CAPACITY IN KW

SELECT
1 OUT OF 3

4. FLOW (L/SEC)

5. APPLICATIONS

Apartments blocks

- Number of apartments
- Type: studio, 1-bedroom, 2-bedroom...

Hotels

- Number of rooms
- Number of stars

Hospitals / Nursery homes

- Number of rooms
- Number of beds/room

6. TEMPERATURES

PRIMARY	☐ 90°C	☐ 80°C	☐ 70°C	☐ 65°C	☐ Other .....
SECONDARY	☐ 10/55°C	☐ 10/60°C	☐ Other		

7. PUMP(S) TYPE

PRIMARY	☐ Single	☐ Double
SECONDARY	☐ Single	☐ Double

8. STORAGE TANKS (IF NEEDED)

Primary tanks

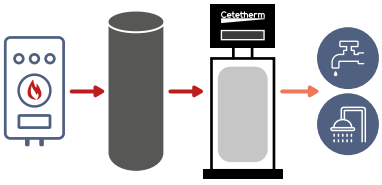

☐ 5 bar Primary Tank carbon steel

- ☐ Insulation M1 / 100mm
- ☐ Insulation M0 / 100mm

Volume .....
(300 - 3000L)

Secondary tanks

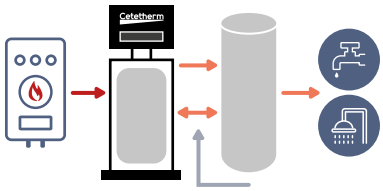

☐ 10 bar AquaTank stainless steel 316Ti

Neodul insulation

Volume .....
(150 - 4000L)

Tanks with heating coil



☐ 10 bar AquaTank stainless steel with heating coil

Neodul insulation

Volume .....
(125 - 1000L)

Please send your completed file to info.uk@cetetherm.com

Cetetherm Helpline UK & Ireland
+44 (0)330 055 2252 info.uk@cetetherm.com www.cetetherm.com/en