


PRE-SELECTION CETETHERM TAP WATER SYSTEMS



^{*} See specific Pre-selection file for AquaCompact units on https://www.cetetherm.com/en/products/tap-water-systems/aquacompact

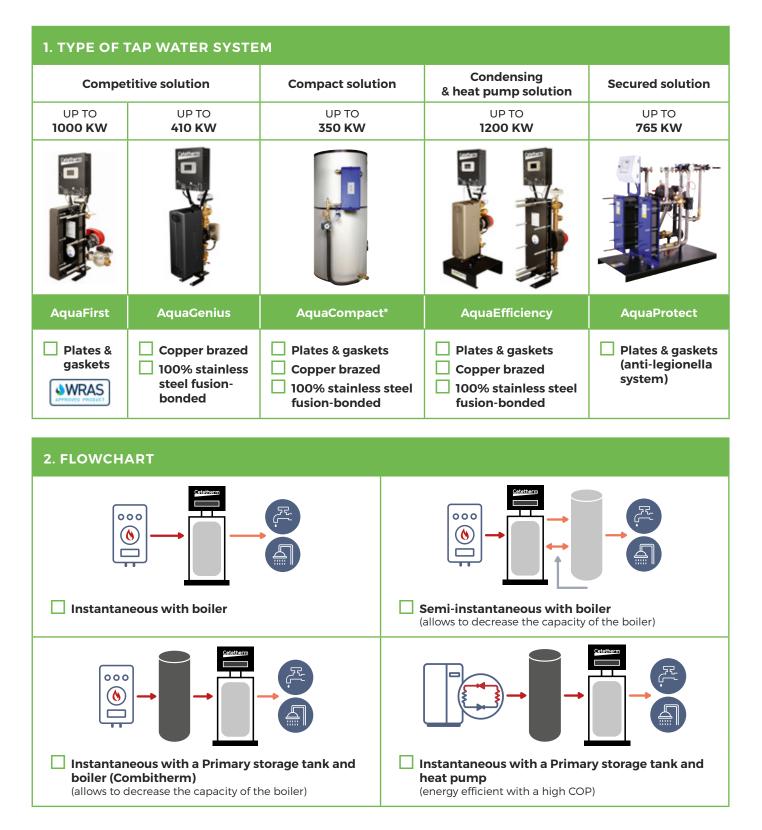

3. CAPACITY IN KW	SELECT A. FLO	OWCHART (L/SEC)
	1 OUT OF 3	
5. APPLICATIONS		
Apartments blocks	Hotels	Hospitals / Nursery homes
Number of apartments Type: studio, 1-bedroom, 2-bedroom	Number of rooms Number of stars	Number of rooms Number of beds/room
6. TEMPERATURES		
PRIMARY 90	o°c	☐ 65°C ☐ Other
SECONDARY	0/55°C	
7. PUMP(S) TYPE		
PRIMARY		
SECONDARY		
8. STORAGE TANKS (IF NEEDED)		
Primary tanks	Secondary tanks	Tanks with heating coil
destinant of the second of the	Seathern Company of the Company of t	
☐ 5 bar Primary Tank carbon steel ☐ Insulation M1 / 100mm ☐ Insulation M0 / 100mm Volume	☐ 10 bar AquaTank stainless steel 316Ti Neodul insulation Volume(150 - 4000L)	10 bar AquaTank stainless steel with heating coil Neodul insulation Volume(125 - 1000L)

Please send your completed file to info.uk@cetetherm.com